

ENGINEERING
TOMORROW

Danfoss

Optyma™ Plus New Generation

Raise your **efficiency** to a higher level. Equipped for **silence** and **top performance**.

Range extension for a complete offer:

- 0.6 - 16.5 kW for MBP refrigeration
- 0.7 - 9.6 kW for LBP refrigeration

50%

less installation
time. A fast fit that
lets you keep up the
tempo



ra.danfoss.co.uk

OPTYMA™ PLUS

DANFOSS CONDENSING UNIT

EcoDesign
2016



A cooler combination

Faster to install, simpler to set up, easier to service

When we asked installers how to improve the known and trusted Optyma™ **Plus**, you told us to make it quicker to install and simpler to set up and service. We listened, and here's the result:

The new generation Optyma™ **Plus** - it's another step forward in plug and play. It will not just save you valuable time and costs in installation, set up and service, it will also reduce your customers' energy bill.

The same robust quality with added technology and smarter design. That's a seriously cool combination.

Silent and top performance for customer confidence

With its long-life compressor, acoustic insulation, component design as well as intelligent fan speed reduction during low capacity operation, the Optyma™ **Plus** is so smooth and quiet that your customers will benefit from the best sound performance in the market.

The highly optimised Micro Channel Heat Exchanger and electronic controller also contribute to considerable energy savings, making the Optyma™ **Plus** up to 20% more economical than an equivalent product offering and that's a sales argument your customers will notice.

Experience up to 20% energy savings from day one!


Up to

25%

lower sound level provides greater comfort in residential areas



In-field stacking cuts costs
With its unique load bearing design, it's possible to stack units in the field. This cuts installation time, and saves on carpentry and brackets to reduce cost.

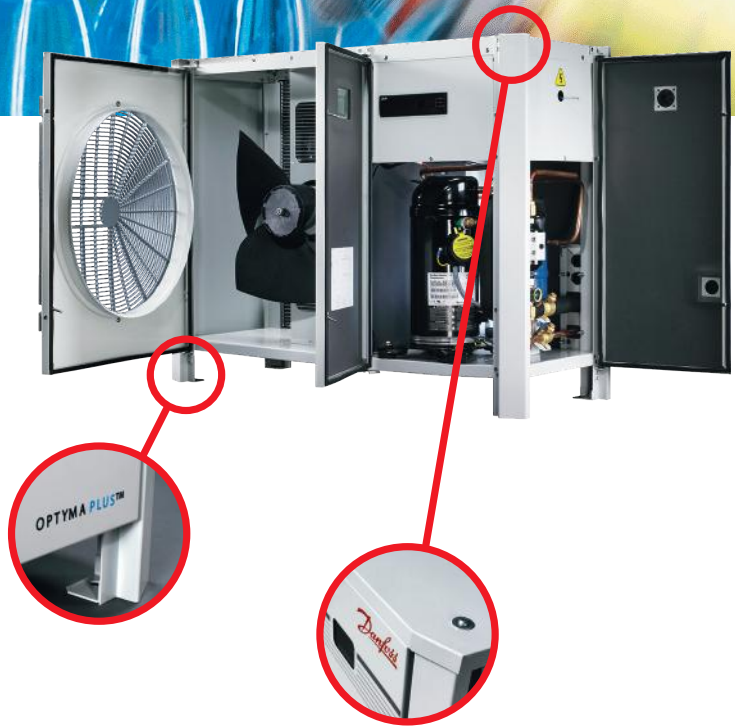

Extend
your possibilities
with new models
for low and medium
temperatures

Designed for **ultimate efficiency**



Quick installation

Compact cabinet speeds installation

New compact design makes it easier to maneuver when fitting in tight spaces, saving installation time.



Easy service

More accessible to speed service

Easier and quicker accessibility to all components with new double door design saves time during servicing, maintenance and repair.



Intelligent

Intelligent technology speeds start up and reduces risk

Preset parameters make it easier to get it right from the start. Fewer mistakes reduce the risk of damage and save time and money on repairs.

Technical data

Designation

OP - MPUM034 ML P00 G

1 2 3 4 5 6 7 8

1	Application: M = MBP / L = LBP
2	Condensing unit family: P = OP+ / S = Slim Pack
3	Refrigerant: H = R404A/R507 ; G = R134a ; Q = R452A/R404A/R507 U = R404A/R507/R22/R134a/R407A/R407F Z = R404A/R507/R134a/R407A/R407F/R452A/R448A/R449A X = R404A/R507/R134a/R407A/R407F/R448A/R449A ; Y = R404A/R507/R449A
4	Condenser: Standard micro Channel heat exchanger
5	Displacement in cm ³
6	Compressor platform
7	Version: P00 : Standard Optyma™ Plus / W05 : Standard Optyma™ Slim Pack
8	Voltage code: G = 230V/1-phase compressor & fan E = 400V/3-phase compressor & 230V/1-phase fan



MLZ compressors may be blue or black depending on the manufacturing origin

Make your choice!

Range extension for a complete offer in low and medium temperatures

MBP – medium temperatures

R134a

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -10°C evap. temp	COP at -10°C evap. temp	Rated COP at Eco-Design conditions	SEPR	Annual electricity consumption kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]
			-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C									
OP-MPGM033	114X4220	1	1 350	1 730	2 170	2 660	3 220	3 850	4 550	840	2.05	2.10			67	36		80
OP-MPXM034	114X4261	1	1 720	2 200	2 740	3 350	4 040	4 810	5 670	1 030	2.14	2.19			68	37		87
	114X4264	3	1 720	2 170	2 690	3 300	4 000	4 790	5 670	980	2.22	2.27			68	37		87
OP-MPXM046	114X4281	1	2 310	2 920	3 620	4 420	5 310	6 310	7 410	1 460	2.00	2.05			68	37	815 x 1055 x 43	87
	114X4284	3	2 330	2 910	3 600	4 390	5 300	6 310	7 430	1 290	2.25	2.30			68	37		87
OP-MPXM057	114X4290	1	2 790	3 520	4 350	5 300	6 350	7 520	8 810	1 920	1.83	1.88			68	37		87
	114X4293	3	2 800	3 520	4 350	5 290	6 360	7 540	8 840	1 600	2.20	2.25			68	37		87
OP-MPXM068	114X4308	1	3 640	4 430	5 450	6 670	8 060	9 580	11 210	2 180	2.03	2.08			69	38		101
	114X4311	3	3 480	4 380	5 440	6 660	8 050	9 610	11 360	1 890	2.31	2.37			69	38		101
OP-MPXM080	114X4321	1	3 950	5 140	6 410	7 800	9 330	11 030	12 890	2 430	2.11	2.16	3.03	10 684	69	38	967 x 1406 x 481	101
	114X4324	3	4 030	5 090	6 310	7 700	9 280	11 050	13 000	2 300	2.21	2.26	3.43	9 350	69	38		101
OP-MPXM108	114X4344	3	5 220	6 520	8 060	9 810	11 750	13 890	16 190	2 910	2.24	2.30	3.58	11 517	75	44		101
OP-MPXM125	114X4414	3	6 440	8 100	10 020	12 190	14 650	17 390	20 430	3 590	2.26	2.31	3.52	14 508	77	46		169
OP-MPXM162	114X4434	3	8 170	10 250	12 640	15 350	18 400	21 780	25 510	4 670	2.20	2.25	3.46	18 715	77	46	966 x 1800 x 600	169

Rating conditions: +32°C ambient, Superheat 10K, Subcooling 0 K
EcoDesign rating conditions: +32°C ambient, Subcooling 0K, RGT20°C

The reliable choice - Known and tested Danfoss technology

- All units 100% factory tested
- High quality Danfoss components inside
- Designed for very low ambient temperatures
- Solid, attractive & corrosion resistant housing

MBP – medium temperatures

R407A

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -10°C evap. temp	COP at -10°C evap. temp	Rated COP at Eco- Design condi- tions	SEPR	Annual electricity consump- tion kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]	
			-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C										
OP-MPXM034	114X4261	1	2 150	2 700	3 350	4 100	4 970	5 940	7 030	1 540	2.17	2.21			68	37	815 x 1055 x 430	87	
	114X4264	3	2 120	2 670	3 310	4 060	4 910	5 870	6 950	1 520	2.18	2.22			68	37		87	
OP-MPXM046	114X4281	1	2 680	3 370	4 160	5 030	6 000	7 070	8 220	2 380	1.74	1.77			68	37		87	
	114X4284	3	2 630	3 320	4 090	4 960	5 920	6 970	8 100	2 330	1.75	1.78			68	37		87	
OP-MPXM057	114X4290	1	3 300	4 160	5 120	6 190	7 380	8 680	10 080	2 860	1.79	1.82	2.95	10 915	68	37		87	
	114X4293	3	3 250	4 090	5 040	6 100	7 280	8 560	9 950	2 820	1.79	1.82	2.95	10 758	68	37		87	
OP-MPXM068	114X4308	1	4 310	5 300	6 470	7 830	9 370	11 110	13 030	3 190	2.03	2.07	3.31	12 254	68	37		967 x 1406 x 481	101
	114X4311	3	4 340	5 340	6 520	7 890	9 450	11 190	13 130	3 060	2.13	2.17	3.47	11 790	68	37			101
OP-MPXM080	114X4321	1	5 040	6 220	7 620	9 250	11 120	13 220	15 560	3 680	2.07	2.11	3.40	14 064	68	37			101
	114X4324	3	5 100	6 290	7 710	9 360	11 240	13 370	15 740	3 420	2.25	2.29	3.68	13 140	68	37			101
OP-MPXM108	114X4344	3	6 270	7 950	9 860	12 020	14 420	17 080	19 970	5 180	1.90	1.94	3.19	19 420	68	37	101		
OP-MPXM125	114X4414	3	7 640	9 610	11 870	14 430	17 300	20 490	24 000	5 670	2.09	2.13	3.37	22 054	68	37	966 x 1800 x 600		169
OP-MPXM162	114X4434	3	9 170	11 700	14 570	17 800	21 390	25 330	29 620	7 810	1.87	1.90	3.11	29 436	68	37			169

R407F

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -10°C evap. temp	COP at -10°C evap. temp	Rated COP at Eco- Design condi- tions	SEPR	Annual electricity consump- tion kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]	
			-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C										
OP-MPXM034	114X4261	1	2 320	2 900	3 590	4 380	5 290	6 310	7 450	1 660	2.16	2.18			68	37	815 x 1055 x 430	87	
	114X4264	3	2 260	2 840	3 510	4 280	5 170	6 170	7 290	1 620	2.16	2.18			68	37		87	
OP-MPXM046	114X4281	1	2 880	3 610	4 440	5 360	6 370	7 470	8 660	2 610	1.70	1.72			68	37		87	
	114X4284	3	2 830	3 550	4 370	5 270	6 280	7 370	8 540	2 550	1.71	1.73			68	37		87	
OP-MPXM057	114X4290	1	3 550	4 450	5 460	6 590	7 830	9 170	10 620	3 140	1.74	1.76	2.91	11 714	68	37		87	
	114X4293	3	3 450	4 320	5 310	6 410	7 630	8 950	10 370	3 030	1.75	1.77	2.91	11 360	68	37		87	
OP-MPXM068	114X4308	1	4 650	5 700	6 930	8 340	9 950	11 750	13 740	3 450	2.01	2.03	3.27	13 183	69	38		967 x 1406 x 481	101
	114X4311	3	4 690	5 750	6 990	8 410	10 030	11 850	13 850	3 310	2.11	2.13	3.42	12 680	69	38			101
OP-MPXM080	114X4321	1	5 450	6 690	8 160	9 870	11 810	14 000	16 430	3 980	2.05	2.07	3.35	15 110	69	38			101
	114X4324	3	5 460	6 710	8 190	9 890	11 840	14 040	16 480	3 790	2.16	2.18	3.52	14 449	69	38			101
OP-MPXM108	114X4344	3	6 520	8 240	10 200	12 390	14 830	17 520	20 450	5 550	1.84	1.85	3.07	20 698	75	44	101		
OP-MPXM125	114X4414	3	8 300	10 410	12 810	15 510	18 520	21 850	25 510	6 040	2.12	2.14	3.41	23 326	77	46	966 x 1800 x 600		169
OP-MPXM162	114X4434	3	9 800	12 460	15 470	18 830	22 550	26 620	31 020	8 380	1.84	1.86	3.05	31 553	77	46			169

Rating conditions: +32°C ambient temp., superheat 10K, subcooling 0K
EcoDesign rating conditions: +32°C ambient, Subcooling 0K, RGT20°C

MBP – medium temperatures

R448A

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -10°C evap temp	COP at -10°C evap temp	Rated COP at Eco- Design conditions	SEPR	Annual electricity consump- tion kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]	
			-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C										
OP-MPXM034	114X4261	1	2 210	2 750	3 380	4 090	4 900	5 800	6 800	1 590	2.13	2.16			68	37	815 x 1055 x 430	87	
	114X4264	3	2 210	2 750	3 370	4 080	4 880	5 780	6 780	1 630	2.07	2.10			68	37		87	
OP-MPXM046	114X4281	1	2 930	3 630	4 440	5 340	6 360	7 490	8 730	2 370	1.87	1.90			68	37		87	
	114X4284*	3	2 910	3 610	4 400	5 300	6 300	7 400	8 610	2 260	1.95	1.98			68	37		87	
OP-MPXM057	114X4290	1	3 530	4 350	5 290	6 330	7 470	8 730	10 080	3 120	1.69	1.72	2.86	11 635	68	37		87	
	114X4293	3	3 440	4 280	5 220	6 250	7 390	8 620	9 950	2 970	1.76	1.78	3.07	10 689	68	37		87	
OP-MPXM068	114X4308	1	4 530	5 640	6 910	8 360	10 000	11 840	13 870	3 160	2.19	2.22	3.45	12 538	69	38		967 x 1406 x 481	101
	114X4311	3	4 570	5 670	6 940	8 380	10 010	11 840	13 870	3 030	2.29	2.33	3.63	11 946	69	38			101
OP-MPXM080	114X4321	1	5 270	6 530	7 960	9 560	11 350	13 330	15 510	3 820	2.08	2.11	3.22	15 486	69	38			101
	114X4324	3	5 330	6 590	8 020	9 650	11 470	13 490	15 720	3 560	2.26	2.29	3.68	13 664	69	38			101
OP-MPXM108	114X4344	3	6 770	8 380	10 180	12 200	14 440	16 900	19 570	5 270	1.93	1.96	3.31	19 336	75	44	101		
OP-MPXM125	114X4414	3	8 290	10 270	12 530	15 090	17 970	21 170	24 690	5 590	2.24	2.28	3.63	21 624	77	46	966 x 1800 x 600		169
OP-MPXM162	114X4434	3	9 650	12 130	14 940	18 100	21 630	25 510	29 760	7 950	1.88	1.91	3.13	30 009	77	46			169

Rating conditions: +32°C ambient temp., superheat 10K, subcooling 0K
 EcoDesign rating conditions: +32°C ambient, Subcooling 0K, RGT20°C
 * Certified performance - Asercom

R449A

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -10°C evap. temp	COP at -10°C evap. temp	Rated COP at Eco- Design conditions	SEPR	Annual electricity consump- tion kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]	
			-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C										
OP-MPYM008	114X4119	1		410	490	620	810	1 060		290	1.68	1.70			60	29	652 x 906 x 356	49	
OP-MPYM009	114X4120	1		450	530	670	880	1 140		330	1.59	1.61			60	29		49	
OP-MPYM012	114X4121	1		620	740	930	1 190	1 520		440	1.68	1.70			60	29		49	
OP-MPYM014	114X4122	1		920	1 180	1 460	1 760	2 100		710	1.64	1.67			60	29		49	
OP-MPYM024	114X4200	1	1 040	1 410	1 860	2 380	2 980	3 680	4 480	900	2.06	2.09			67	36	815 x 1055 x 430	80	
OP-MPYM026	114X4212	1	1 210	1 600	2 060	2 600	3 230	3 950	4 780	1 010	2.04	2.08			67	36		80	
	114X4213	3	1 170	1 580	2 060	2 610	3 250	3 990	4 830	1 060	1.95	1.98			67	36		80	
OP-MPYM034	114X4226	1	1 510	2 010	2 600	3 270	4 050	4 940	5 930	1 410	1.84	1.87			67	36		80	
	114X4227	3	1 510	2 000	2 560	3 210	3 960	4 810	5 770	1 340	1.90	1.94			67	36		80	
OP-MPXM034	114X4261	1	2 200	2 750	3 370	4 090	4 890	5 800	6 800	1 590	2.13	2.16			68	37		87	
	114X4264	3	2 200	2 740	3 370	4 080	4 880	5 780	6 780	1 630	2.07	2.10			68	37		87	
OP-MPXM046	114X4281	1	2 920	3 630	4 430	5 340	6 360	7 490	8 730	2 370	1.87	1.90			68	37		87	
	114X4284	3	2 900	3 600	4 400	5 290	6 290	7 400	8 610	2 260	1.95	1.98			68	37		87	
OP-MPXM057	114X4290	1	3 520	4 350	5 280	6 320	7 470	8 720	10 080	3 120	1.69	1.72	2.86	11 635	68	37		87	
	114X4293	3	3 430	4 270	5 210	6 250	7 380	8 610	9 950	2 970	1.75	1.78	3.07	10 689	68	37	87		
OP-MPXM068	114X4308	1	4 520	5 630	6 900	8 360	9 990	11 830	13 870	3 160	2.19	2.22	3.45	12 538	69	38	967 x 1406 x 481	101	
	114X4311	3	4 560	5 660	6 930	8 370	10 000	11 840	13 870	3 030	2.29	2.33	3.63	11 946	69	38		101	
OP-MPXM080	114X4321	1	5 260	6 520	7 940	9 550	11 340	13 330	15 510	3 820	2.08	2.11	3.22	15 486	69	38		101	
	114X4324	3	5 320	6 580	8 010	9 640	11 460	13 490	15 720	3 560	2.25	2.29	3.68	13 664	69	38		101	
OP-MPXM108	114X4344	3	6 760	8 360	10 170	12 190	14 430	16 890	19 570	5 270	1.93	1.96	3.31	19 336	75	44		101	
OP-MPXM125	114X4414	3	8 270	10 250	12 510	15 070	17 950	21 160	24 690	5 590	2.24	2.28	3.63	21 624	77	46		966 x 1800 x 600	169
OP-MPXM162	114X4434	3	9 630	12 110	14 920	18 080	21 610	25 500	29 760	7 950	1.88	1.91	3.13	30 009	77	46			169

MBP – medium temperatures

R404A

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -10/-25°C evap temp	COP at -10/-25°C evap temp	Rated COP at Eco-Design conditions	SEPR	Annual electricity consumption kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]
			-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C									
OP-MPHM007	114X4101	1		570	710	860	1 040	1 250	440	1.60	1.68			60	29		52	
OP-MPYM008	114X4119	1		680	850	1 030	1 230	1 450	420	2.02	2.11			60	29		49	
OP-MPYM009	114X4120	1		740	910	1 110	1 320	1 550	480	1.90	1.99			60	29		49	
OP-MPHM010	114X4102	1	600	760	940	1 150	1 400	1 670	540	1.73	1.81			60	29		52	
OP-MPHM012	114X4104	1	730	910	1 120	1 370	1 650	1 970	640	1.75	1.83			60	29	652 x 906 x 356	52	
OP-MPYM012	114X4121	1		1 010	1 240	1 490	1 750	2 030	650	1.92	2.01			60	29		49	
OP-MPYM014	114X4122	1		1 030	1 280	1 550	1 840	2 160	790	1.61	1.69			60	29		49	
OP-MPHM015	114X4105	1	880	1 100	1 350	1 640	1 970	2 330	820	1.65	1.73			60	29		52	
OP-MPHM018	114X4109	1	1 030	1 280	1 560	1 900	2 270	2 690	900	1.74	1.83			60	29		52	
OP-MPYM018	114X4230**	1	1 070	1 350	1 660	2 020	2 420	2 880	900	1.85	1.93			68	37		80	
OP-MPYM024	114X4200	1		1 640	2 070	2 560	3 110	3 720	1 040	1.98	2.07			67	36		80	
OP-MPYM026	114X4212	1	1 460	1 840	2 290	2 790	3 350	3 980	1 170	1.95	2.05			67	36		80	
	114X4213	3	1 420	1 820	2 280	2 800	3 380	4 020	1 230	1.86	1.95			67	36		80	
OP-MPYM034	114X4226	1	1 800	2 300	2 860	3 480	4 170	4 920	1 650	1.74	1.82			67	36		80	
	114X4227	3	1 810	2 290	2 820	3 420	4 080	4 800	1 570	1.80	1.89			67	36	815 x 1055 x 430	80	
OP-MPXM034	114X4261	1	2 370	2 890	3 480	4 140	4 880	5 700	1 750	1.99	2.08			68	37		87	
	114X4264	3	2 250	2 790	3 400	4 070	4 820	5 640	1 680	2.02	2.11			68	37		87	
OP-MPXM046	114X4281	1	3 150	3 820	4 580	5 420	6 350	7 370	2 410	1.90	1.99			68	37		87	
	114X4284*	3	3 110	3 770	4 510	5 340	6 260	7 270	2 320	1.94	2.03			68	37		87	
OP-MPXM057	114X4290	1	3 620	4 380	5 240	6 190	7 230	8 370	3 240	1.62	1.69	2.90	11 795	68	37		87	
	114X4293	3	3 630	4 390	5 250	6 200	7 250	8 400	3 120	1.68	1.76	3.01	11 397	68	37		87	
OP-MPXM068	114X4308	1	4 830	5 930	7 180	8 590	10 180	11 950	3 330	2.16	2.26	3.66	12 728	69	38		101	
	114X4311	3	4 830	5 930	7 180	8 590	10 180	11 950	3 250	2.20	2.31	3.73	12 468	69	38		101	
OP-MPXM080	114X4321	1	5 500	6 810	8 270	9 890	11 650	13 540	4 000	2.07	2.17	3.33	16 142	69	38	967 x 1406 x 481	101	
	114X4324	3	5 710	6 950	8 350	9 930	11 680	13 610	3 820	2.19	2.29	3.71	14 633	69	38		101	
OP-MPXM108	114X4344	3	7 150	8 650	10 320	12 170	14 210	16 460	5 410	1.91	2.00	3.31	20 322	75	44		101	
OP-MPXM125	114X4414	3	8 510	10 550	12 820	15 330	18 070	21 070	6 160	2.08	2.18	3.48	23 928	77	46		169	
OP-MPXM162	114X4434	3	11 400	13 620	16 030	18 680	21 590	24 800	8 420	1.90	1.99	3.23	32 292	77	46	966 x 1800 x 600	169	

Rating conditions: +32°C ambient, Superheat 10K, Subcooling 0 K
EcoDesign rating conditions: +32°C ambient, Subcooling 0 K, RGT20°C
* Certified performance - Asercom / ** Preliminary data

LBP – low temperatures

R404A

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -25°C evap. temp	COP at -25°C evap. temp	Rated COP at Eco-Design conditions	SEPR	Annual electricity consumption kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]
			-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C									
OP-LPQM017	114X3118	1		480	640	820	1 010	1 230	1 460	620	1.33	1.07			60	29	652 x 906 x 356	49
OP-LPHM018	114X3109	1	360	490	640	820	1 040	1 280	1 560	720	1.15	0.96			60	29		53
OP-LPQM026	114X3216	1	450	640	870	1 140	1 450	1 810	2 220	910	1.26	1.01			67	36		80
OP-LPQM048	114X3225	1	650	980	1 380	1 850	2 400	3 020	3 710	1 440	1.28	1.01			69	38		80
	114X3233	3	670	1 000	1 390	1 850	2 370	2 960	3 610	1 430	1.29	1.13			69	38		80
OP-LPQM074	114X3252	1	980	1 440	1 970	2 580	3 270	4 030	4 880	2 250	1.15	0.98			69	38	815 x 1055 x 430	94
	114X3253	3	990	1 430	1 970	2 590	3 290	4 070	4 930	2 090	1.24	1.07			69	38		89
OP-LPQM068	114X3241	1	1 190	1 610	2 110	2 690	3 360	4 100	4 910	2 180	1.23	1.06			70	39		80
	114X3249	3	1 170	1 630	2 160	2 770	3 450	4 200	5 020	2 130	1.30	1.14			70	39		80
OP-LPQM096	114X3357	3	1 430	2 030	2 780	3 700	4 810	6 110	7 600	2 720	1.36	1.15	1.52	11 218	72	41	967 x 1406 x 481	107
OP-LPQM136	114X3365	3	2 200	3 040	4 060	5 250	6 620	8 170	9 900	4 230	1.24	1.10	1.59	16 195	73	42		107
OP-LPQM215	114X3476	3	3 680	4 690	5 890	7 310	8 960	10 840	12 960	5 000	1.46	1.25	1.71	23 171	78	47		169
OP-LPQM271	114X3482	3	4 950	6 240	7 750	9 500	11 490	13 740	16 240	6 790	1.40	1.23	1.81	29 365	78	47	966 x 1800 x 600	169

R452A

LBP – low temperatures

Unit	Code	Phases	Cooling capacity in [W] at evaporating temperature [°C]							Power consumption [W] at -25°C evap temp	COP at -25°C evap temp	Rated COP at Eco- Design condi- tions	SEPR	Annual electricity consump- tion kWh	Sound power level dB(A)	Sound pressure level 10m dB(A)	Dimensions H x W x D [mm]	Net Weight [kg]
			-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C									
OP-LPQM017	114X3118	1		430	580	740	930	1130	1350	570	1.31	1.03			60	29	652 x 906 x 356	49
OP-LPQM026	114X3216	1	370	540	750	1 010	1 320	1 680	2 110	860	1.18	0.89			67	36		80
OP-LPQM048	114X3233	3	680	1 000	1 400	1 860	2 410	3 030	3 720	1 830	1.18	1.21			69	38		80
OP-LPQM048	114X3225	1	640	960	1 360	1 830	2 380	3 020	3 480	1 250	1.46	1.16			69	38		80
OP-LPQM074	114X3252	1	810	1 230	1 730	2 330	3 030	3 840	4 760	2 110	1.11	0.88			69	38	815 x 1055 x 430	94
	114X3253	3	810	1 220	1 730	2 340	3 060	3 880	4 810	1 960	1.19	0.96			69	38		89
OP-LPQM068	114X3249	3	1150	1 620	2 160	2 800	3 500	4 280	5 110	1 830	1.53	1.31			70	39		80
	114X3241	1	1180	1 640	2 170	2 790	3 490	4 280	5 140	2 110	1.33	1.11			70	39		80
OP-LPQM096	114X3357	3	1480	2 100	2 880	3 820	4 930	6 220	7 680	6 650	1.41	1.23	1.62	10 744	72	41	967 x 1406 x 481	107
OP-LPQM136	114X3365	3	2350	3 200	4 320	5 450	6 860	8 450	10 220	3 980	1.37	1.19	1.61	16 467	73	42		107
OP-LPQM215	114X3476	3	3340	4 260	5 360	6 650	8 160	9 910	11 910	4 710	1.41	1.20	1.67	21 203	78	47	966 x 1800 x 600	169
OP-LPQM271	114X3482	3	4780	6 060	7 580	9 350	11 390	13 720	16 340	6 650	1.40	1.24	1.74	29 027	78	47		169

Rating conditions: +32°C ambient temp., superheat 10K, subcooling 0K
EcoDesign rating conditions: +32°C ambient, Subcooling 0K, RGT20°C

Change for the better

At Danfoss we strongly believe in innovation, but only when it directly benefits our customers. We offer smarter ways of helping you fulfil your daily challenge of producing higher quality solutions at ever more competitive costs.

For more information related to EcoDesign compliance, please refer to Coolselector® at coolselector.danfoss.com or contact Danfoss.



Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed materials. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.